

Features


- Watch crystal
- Withstand to heat and environmental conditions
- Stable crystal resonator

General Specifications

Frequency Range	32.768 KHz
Frequency Tolerance	±20 ppm maximum
Parabolic Curvature Contant	$-3.6 \times 10^{-8} / ^\circ\text{C}^2$ maximum
Operating Temperature Range	-10 °C to +60 °C
Turnover Temperature	25 °C ± 5 °C
Equivalent Series Resistance	35 Kohm maximum
Load Capacitance	12.5 pF
Drive Level	0.1 μW
Aging per year	$< \pm 5 \times 10^{-6}$

* Remarks : Please contact us for other specifications
Specifications are subjected to change without notice.

Dimensions

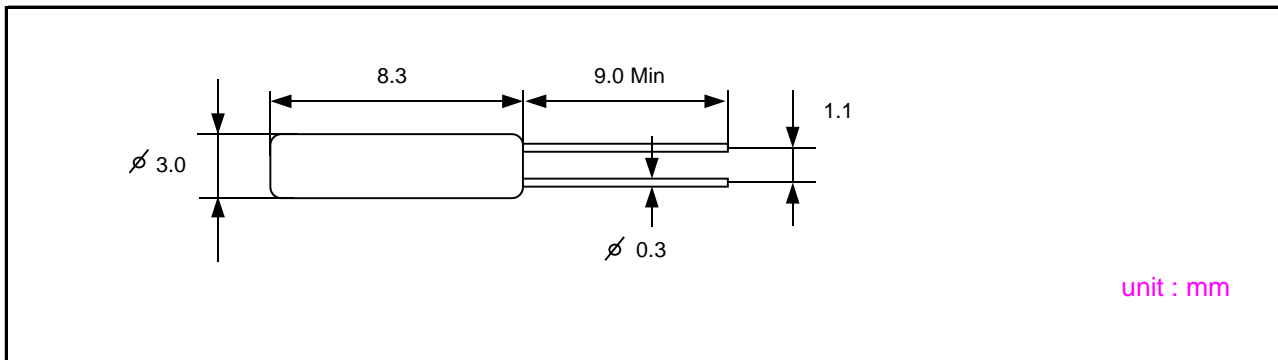

HCJ Quartz (S) Pte Ltd. Alexandra Distripark, Block 2, #11-18, Pasir Panjang Road,
Singapore 118481. Fax: 65-62786795 Tel: 65-62731088 E-mail: hcj@hcjquartz.com