

ER26500M Lithium Thionyl Chloride Battery

Brief Datasheet

1 Basic Specification


(Typical values relative to cells stored for one year or less at +30°C max.)

Nominal capacity (at 10mA +23°C, 2.0V cut off)	6500mAh
Nominal voltage	3.6V
Standard discharge current	10mA
Maximum continuous current	1000mA
Maximum pulse current	2000mA
Operating temperature range	-55°C- +85°C
Storage temperature (recommended)	+30°C Max
Weight	53g




*High power type is spiral structure and best suit for high current discharge.

*Underwriters Laboratories (UL) Component Recognition (File Number MH 20555).

2 Dimension

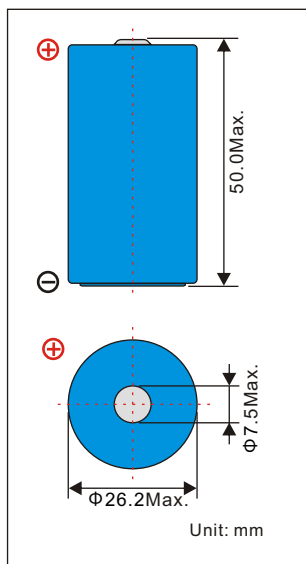

3 Electrical Characteristics

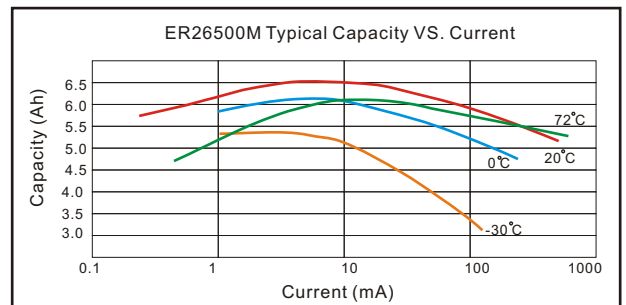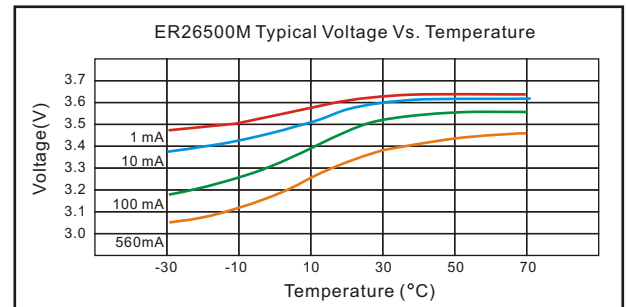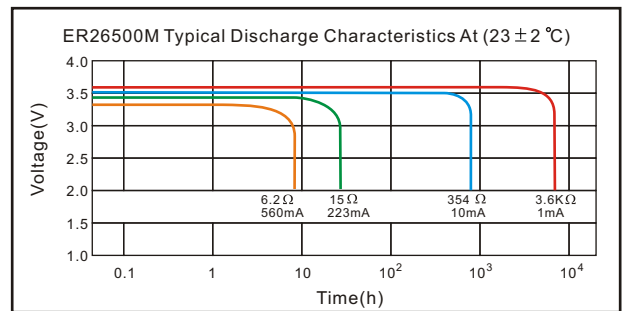

Hi-POWER TYPE

Note: Any representations in this brochure concerning performance, are for informational purposes only and are not construed as warranties either expressed or implied, of future performance.