


HPWA-MH00	HPWT-MH00	HPWN-MB00
HPWA-DH00	HPWT-DH00	HPWN-MC00
HPWT-RD00	HPWT-BH00	HPWN-MG00
HPWT-MD00	HPWT-RL00	
HPWT-DD00	HPWT-ML00	
HPWT-BD00	HPWT-DL00	
HPWT-RH00	HPWT-BL00	

SuperFlux LEDs

Technical Datasheet DS05

This revolutionary package design allows the lighting designer to reduce the number of LEDs required and provide a more uniform and unique illuminated appearance than with other LED solutions. This is possible through the efficient optical package design and high-current capabilities.

The low profile package can be easily coupled with reflectors or lenses to efficiently distribute light and provide the desired lit appearance. This product family employs the world's brightest red, red-orange, amber, blue, cyan, and green LED materials, which allow designers to match the color of many lighting applications like vehicle signal lamps, specialty lighting, and electronic signs.

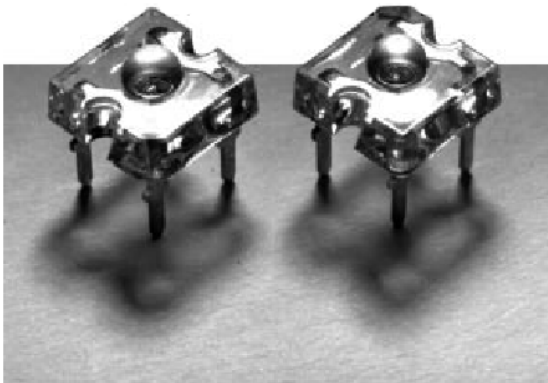

Benefits

- Rugged Lighting Products
- Electricity Savings
- Maintenance Savings


Features

- High Luminance
- Uniform Color
- Low Power Consumption
- Low Thermal Resistance
- Low Profile
- Meets SAE/ECE/JIS Automotive Color Requirements
- Packaged in tubes for use with automatic insertion equipment

Typical Applications

- Automotive Exterior Lighting
- Electronic Signs and Signals
- Specialty Lighting

Outline Drawings

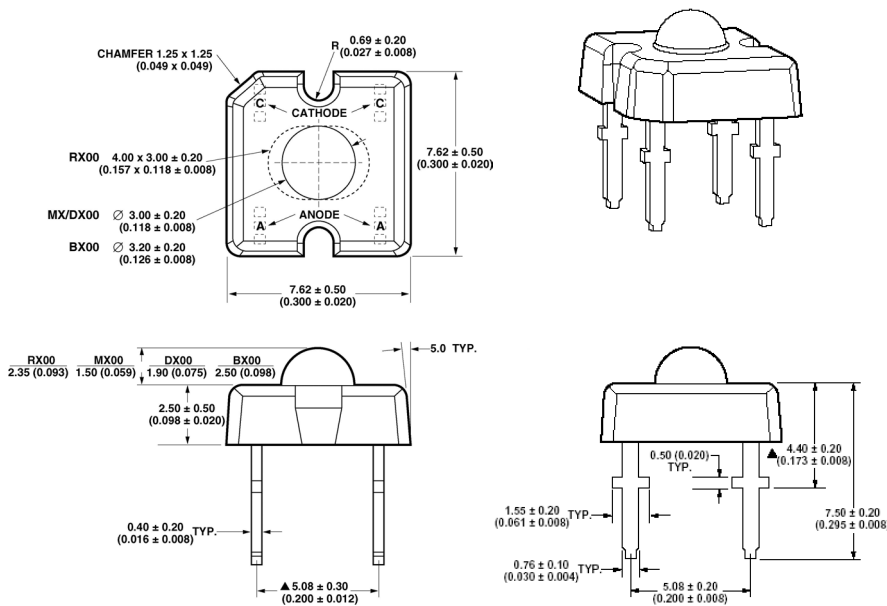

Selection Guide

DEVICE TYPE	LED COLOR	TOTAL FLUX Φ_V (LM)	
		70 mA ^[1] (HPWA, HPWT) 50 mA (HPWN) TYP.	TOTAL INCLUDED ANGLE $\theta_{0.90V}$ (DEGREES) ^[2] TYP.
HPWA-MH00	AS ALINGAP RED-ORANGE	1.5	95
HPWA-DH00			75
HPWT-RD00	TS ALINGAP RED	3.5	44 X 88
HPWT-MD00			100
HPWT-DD00			70
HPWT-BD00			50
HPWT-RH00			44 X 88
HPWT-MH00	TS ALINGAP RED-ORANGE	4.2	100
HPWT-DH00			70
HPWT-BH00			50
HPWT-RL00			44 X 88
HPWT-ML00	TS ALINGAP AMBER	1.7	100
HPWT-DL00			70
HPWT-BL00			50
HPWN-MB00	INGAN BLUE	2.0	110
HPWN-MC00	INGAN CYAN	5.0	110
HPWN-MG00	INGAN GREEN	4.5	110

Notes:

- Φ_V is the total luminous flux output as measured with an integrating sphere after the device has stabilized. ($R_{\theta_{J-A}} = 200^\circ$ C/W, $T_A = 25^\circ$ C)
- $\theta_{0.90V}$ is the included angle at which 90% of the total luminous flux is captured.

Absolute Maximum Ratings at $T_A = 25\text{ }^\circ\text{C}$

PARAMETER	HPWA	HPWT	HPWN	UNITS
DC FORWARD CURRENT ^[1]	70	70	50	mA
POWER DISSIPATION	187	221	233	MW
REVERSE VOLTAGE ($I_R = 100\ \mu\text{A}$)	10	10	0.55	V
OPERATING TEMPERATURE RANGE	-40 TO +100			$^\circ\text{C}$
STORAGE TEMPERATURE RANGE	-55 TO +100			$^\circ\text{C}$
HIGH TEMPERATURE CHAMBER	125 $^\circ\text{C}$, 2 HOURS			
LED JUNCTION TEMPERATURE	125 $^\circ\text{C}$			
SOLDER CONDITIONS ^[2]				
PREHEAT TEMPERATURE	100 $^\circ\text{C}$ FOR 30 SECONDS			
SOLDER TEMPERATURE	260 $^\circ\text{C}$ FOR 5 SECONDS			
	[1.5MM (0.06 IN) BELOW SEATING PLANE			

Optical Characteristics at $T_A = 25\text{ }^\circ\text{C}$, $I_F = 70\text{ mA}$ (HPWA, HPWT), $I_F = 50\text{ mA}$ (HPWN) $R_{\theta J-A} = 200\text{ }^\circ\text{C/W}$

DEVICE TYPE	PEAK WAVELENGTH λ_{PEAK} (NM) TYP.	DOMINANT WAVELENGTH λ_{DOM} (NM) ^[1] TYP.	TOTAL INCLUDED ANGLE $\theta_{0.90V}$ (DEGREES) ^[2] TYP.	LUMINOUS INTENSITY/TOTAL FLUX $I_v(\text{CD})/\Phi_v(\text{LM})$ TYP.	VIEWING ANGLE $\theta^{1/2}$ (DEGREES) TYP.
HPWA-MH00	624	618	95	0.6	90
HPWA-DH00			75	0.9	60
HPWT-RD00			44 X 88	1.25	25 X 68
HPWT-MD00	640	630	100	0.6	70
HPWT-DD00			70	1.5	40
HPWT-BD00			50	2.0	30
HPWT-RH00			44 X 88	1.25	25 X 68
HPWT-MH00	626	620	100	0.6	70
HPWT-DH00			70	1.5	40
HPWT-BH00			50	2.0	30
HPWT-RL00			44 X 88	1.25	25 X 68
HPWT-ML00	596	594	100	0.6	70
HPWT-DL00			70	1.5	40
HPWT-BL00			50	2.0	30
HPWN-MB00	460	470	110	0.9	90
HPWN-MC00	503	505	110	0.9	90
HPWN-MG00	520	525	110	0.9	90

Electrical Characteristics at $T_A = 25\text{ }^\circ\text{C}$

DEVICE TYPE	FORWARD VOLTAGE V_F (VOLTS) @ $I_F = 70\text{ mA}$ (HPWA, HPWT) $I_F = 50\text{ mA}$ (HPWN)			REVERSE BREAKDOWN VOLTAGE V_R (VOLTS) ^[1] @ $I_R = 100\ \mu\text{A}$		CAPACITANCE C (PF) $V_F = 0$, $F = 1\text{ MHz}$.	THERMAL RESISTANCE $R_{\theta J-PIN}$ ($^\circ\text{C/W}$)	SPEED OF RESPONSE τ_s (NS) ^[2]
	MIN	TYP	MAX	MIN	TYP			
HPWA-xH00	1.83	2.1	2.67	10	20	40	155	20
HPWT-xD00	2.19	2.5	3.03	10	20	40	125	20
HPWT-xH00	2.19	2.5	3.03	10	20	40	125	20
HPWT-xL00	2.19	2.6	3.15	10	20	40	125	20
HPWN-xB00	3.29	3.8	4.66	0.55	0.65	1900	130	20
HPWN-xC00	3.29	3.8	4.66	0.55	0.65	1900	130	20
HPWN-xG00	3.29	3.9	4.66	0.55	0.65	1900	130	20

Notes:

- De-rate as shown in Figures 4a, 4b and 4c.
- Detailed wave soldering instructions are available.

Notes:

- The dominant wavelength is derived from the CIE Chromaticity Diagram and represents the perceived color of the device.
- $\theta_{0.90V}$ is the included angle at which 90% of the total luminous flux is captured.

Notes:

- Operation in reverse bias is not recommended.
- τ_s is the time constant, e^{-t/τ_s} .

Part Number Selection

Red

PART NUMBER	DESCRIPTION	VIEWING ANGLE $\theta^{1/2}$ (DEG.)	MIN. FLUX ⁽¹⁾ Φ_V (LM)	MAX. FLUX Φ_V (LM)	MINIMUM INTENSITY (CD)	MAXIMUM INTENSITY (CD)
HPWT-RDOO-00000		25x68	1.5		1.9	
HPWT-RDOO-D4000		25x68	2.0	4.8	2.5	6.0
HPWT-RDOO-E4000		25x68	2.5	6.1	3.1	7.6
HPWT-RDOO-F4000		25x68	3.0	7.3	3.8	9.1
HPWT-BDOO-00000		30	1.5		3.0	
HPWT-BDOO-D4000		30	2.0	4.8	4.0	9.6
HPWT-BDOO-E4000		30	2.5	6.1	5.0	12.2
HPWT-BDOO-F4000		30	3.0	7.3	6.0	14.6
HPWT-DDOO-00000	SUPERFLUX LED	40	1.5		2.3	
HPWT-DDOO-D4000		40	2.0	4.8	3.0	7.2
HPWT-DDOO-E4000		40	2.5	6.1	3.8	9.2
HPWT-DDOO-F4000		40	3.0	7.3	4.5	11.0
HPWT-MDOO-00000		70	1.5		0.9	
HPWT-MDOO-D4000		70	2.0	4.8	1.2	2.9
HPWT-MDOO-E4000		70	2.5	6.1	1.5	3.7
HPWT-MDOO-F4000		70	3.0	7.3	1.8	4.4

1. Φ_V is the total luminous flux output as measured with an integrating sphere after the device has stabilized.

Red-Orange

PART NUMBER	DESCRIPTION	VIEWING ANGLE $\theta^{1/2}$ (DEG.)	MIN. FLUX Φ_V (LM)	MAX. FLUX Φ_V (LM)	MINIMUM INTENSITY (CD)	MAXIMUM INTENSITY (CD)
HPWT-RH00-00000		25x68	1.5		1.9	
HPWT-RH00-D4000		25x68	2.0	4.8	2.5	6.0
HPWT-RH00-E4000		25x68	2.5	6.1	3.1	7.6
HPWT-RH00-F4000		25x68	3.0	7.3	3.8	9.1
HPWT-RH00-G4000		25x68	3.5	9.7	4.4	12.1
HPWT-RH00-H4000		25x68	4.0	12.0	5.0	15.0
HPWT-BH00-00000		30	1.5		3.0	
HPWT-BH00-D4000		30	2.0	4.8	4.0	9.6
HPWT-BH00-E4000		30	2.5	6.1	5.0	12.2
HPWT-BH00-F4000		30	3.0	7.3	6.0	14.6
HPWT-BH00-G4000		30	3.5	9.7	7.0	19.4
HPWT-BH00-H4000		30	4.0	12.0	8.0	24.0
HPWT-DH00-00000		40	1.5		2.3	
HPWT-DH00-D4000	SUPERFLUX LED	40	2.0	4.8	3.0	7.2
HPWT-DH00-E4000		40	2.5	6.1	3.8	9.2
HPWT-DH00-F4000		40	3.0	7.3	4.5	11.0
HPWT-DH00-G4000		40	3.5	9.7	5.3	14.6
HPWT-DH00-H4000		40	4.0	12.0	6.0	18.0
HPWT-MH00-00000		70	1.5		0.9	
HPWT-MH00-D4000		70	2.0	4.8	1.2	2.9
HPWT-MH00-E4000		70	2.5	6.1	1.5	3.7
HPWT-MH00-F4000		70	3.0	7.3	1.8	4.4
HPWT-MH00-G4000		70	3.5	9.7	2.1	5.8
HPWT-MH00-H4000		70	4.0	12.0	2.4	7.2
HPWA-MH00-B4000		90	1.0	3.6	0.6	2.2
HPWA-DH00-B4000		40	1.0	3.6	1.5	5.4
HPWA-MH00-C4000		90	1.5	4.2	0.9	2.5
HPWA-DH00-C4000		40	1.5	4.2	2.3	6.3

Amber

PART NUMBER	DESCRIPTION	VIEWING ANGLE $\theta^{1/2}$ (DEG.)	MIN. FLUX Φ_V (LM)	MAX. FLUX Φ_V (LM)	MINIMUM INTENSITY (CD)	MAXIMUM INTENSITY (CD)
HPWT-RL00-00000		25x68	1.0		1.3	
HPWT-RL00-C4000		25x68	1.5	4.2	1.9	5.3
HPWT-RL00-D4000		25x68	2.0	4.8	2.5	6.0
HPWT-BL00-00000		30	1.0		2.0	
HPWT-BL00-C4000		30	1.5	4.2	3.0	8.4
HPWT-BL00-D4000		30	2.0	4.8	4.0	9.6
HPWT-DL00-00000	SUPERFLUX LED	40	1.0		1.5	
HPWT-DL00-C4000		40	1.5	4.2	2.3	6.3
HPWT-DL00-D4000		40	2.0	4.8	3.0	7.2
HPWT-ML00-00000		70	1.0		0.6	
HPWT-ML00-C4000		70	1.5	4.2	0.9	2.5
HPWT-ML00-D4000		70	2.0	4.8	1.2	2.9

Green

PART NUMBER	DESCRIPTION	VIEWING ANGLE $\theta^{1/2}$ (DEG.)	MIN. FLUX Φ_V (LM)	MAX. FLUX Φ_V (LM)	MINIMUM INTENSITY (CD)	MAXIMUM INTENSITY (CD)
HPWN-MG00-00000	SUPERFLUX LED	90	3.0		2.7	

Cyan

PART NUMBER	DESCRIPTION	VIEWING ANGLE $\theta^{1/2}$ (DEG.)	MIN. FLUX Φ_V (LM)	MAX. FLUX Φ_V (LM)	MINIMUM INTENSITY (CD)	MAXIMUM INTENSITY (CD)
HPWN-MC00-00000	SUPERFLUX LED	90	3.0		2.7	

Blue

PART NUMBER	DESCRIPTION	VIEWING ANGLE $\theta^{1/2}$ (DEG.)	MIN. FLUX Φ_V (LM)	MAX. FLUX Φ_V (LM)	MINIMUM INTENSITY (CD)	MAXIMUM INTENSITY (CD)
HPWN-MB00-00000	SUPERFLUX LED	90	1.0		0.9	

Figures

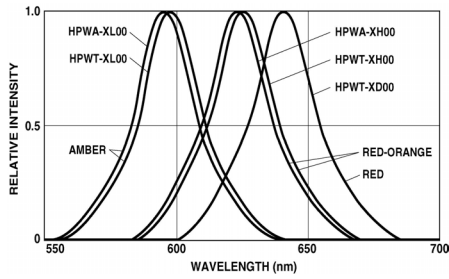


Figure 1a. Relative Intensity vs. Wavelength

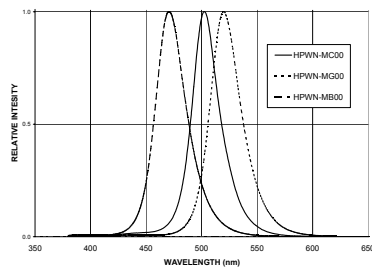


Figure 1b. Relative Intensity vs. Wavelength (HPWN)




Figure 2a. Forward Current vs. Forward Voltage

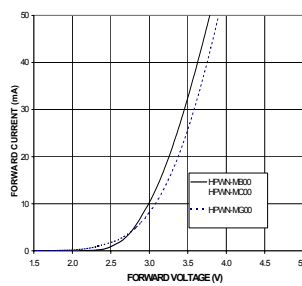


Figure 2b. Forward Current vs. Forward Voltage




Figure 3. HPWA/HPWT-xx00 Relative Luminous Flux vs. Forward Current.




Figure 4a. HPWA-xx00 Maximum DC Forward Current vs. Ambient Temperature.




Figure 4b. HPWT-xx00 Maximum DC Forward Current vs. Ambient Temperature.




Figure 4c. HPWN-xx00 Maximum DC Forward Current vs. Ambient Temperature.

Note:
1.24 mm² of Cu pad per emitter at cathode lead is recommended for lowest thermal resistance.

Figures

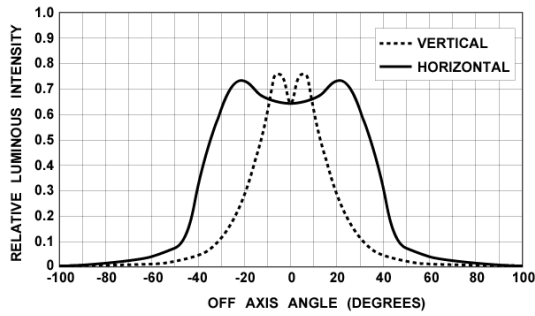


Figure 5a. HPWT-Rx00 Relative Luminous Intensity vs. Off Axis Angle.

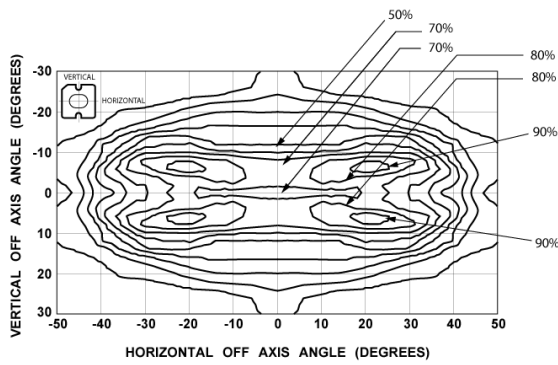


Figure 5b. HPWT-Rx00 Relative Luminous Intensity vs. Off Axis Angle. Iso-Intensity Contour Plot.

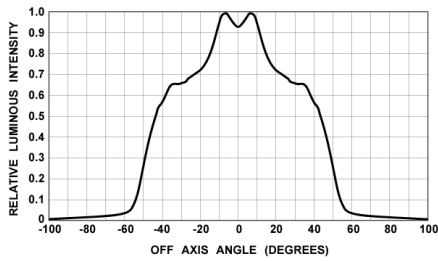


Figure 5c. HPWA-Mx00 Relative Luminous Intensity vs. Off Axis Angle.

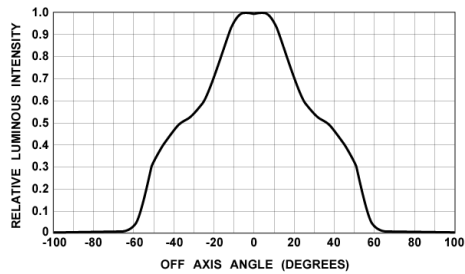


Figure 5d. HPWT-Mx00 Relative Luminous Intensity vs. Off Axis Angle.

Figures

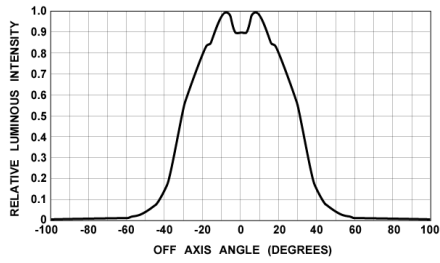


Figure 5e. HPWA(T)-Dx00 Relative Luminous Intensity vs. Off Axis Angle.

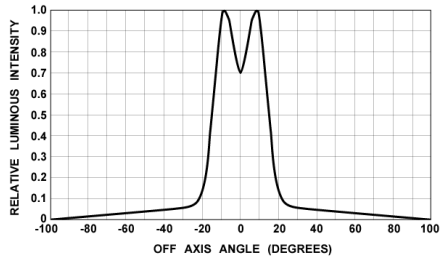


Figure 5f. HPWT-Bx00 Relative Luminous Intensity vs. Off Axis Angle.

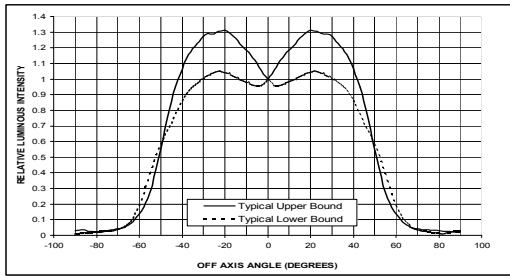


Figure 5g. HPWN-Mx00 Relative Luminous Intensity vs. Off Axis Angle

Company Information

Lumileds is a world-class supplier of Light Emitting Diodes (LEDs) producing billions of LEDs annually. Lumileds is a fully integrated supplier, producing core LED material in all three base colors (Red, Green, Blue) and White. Lumileds has R&D development centers in San Jose, California and Best, The Netherlands. Production capabilities in San Jose, California and Malaysia.

Lumileds is pioneering the high-flux LED technology and bridging the gap between solid state LED technology and the lighting world. Lumileds is absolutely dedicated to bringing the best and brightest LED technology to enable new applications and markets in the lighting world.

LUMILEDS™
LIGHT FROM SILICON VALLEY

©2002 Lumileds Lighting. All rights reserved. Lumileds Lighting is a joint venture between Agilent Technologies and Philips Lighting. Luxeon is a trademark of Lumileds Lighting, LLC. Product specifications are subject to change without notice.

Lumileds may make process or materials changes affecting the performance or other characteristics of our products. These products supplied after such changes will continue to meet published specifications, but may not be identical to products supplied as samples or under prior orders.

LUMILEDS

www.luxeon.com
www.lumileds.com

For technical assistance or the location of your nearest Lumileds sales office, call:

Worldwide:
+1 408-435-6044
US Toll free: 877-298-9455
Europe: +31 499 339 439
Asia: +65 6248 4759
Fax: 408-435-6855
Email us at info@lumileds.com

Lumileds Lighting, LLC
370 West Trimble Road
San Jose, CA 95131